

CONSTRUCTION PRODUCTS REGULATION (EU) 305/2011

DECLARATION OF PERFORMANCE

DoP N°: DML070 (revision 2)



1. Unique identification code of the product type:

**High Security Fortress Single Point Mortice Lock**

2. Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11(4) of the CPR:

**332-61 & 332-62**

3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:

**When used with an appropriate door closing device on fire and/or smoke control doors to fulfil the self-closing requirement of such doors, and thereafter to ensure that the door remains shut.**

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11 (5):

ERA Home Security  
Straight Road  
Short Heath  
Willenhall  
West Midlands  
WV12 5RA  
United Kingdom

Tel: +44 (0) 1922 490049  
Fax: +44 (0) 1922 494420

5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2):

**N/A**

6. System or systems of assessment and verification of constancy of performance of the construction product as set out in CPR, Annex V:

**System 1**

7. In case of the declaration of performance concerning a construction product covered by a harmonized standard:

**EN 12209:2003/ AC 2005**  
**Notified testing laboratory No 1121, performed the type testing and issued test reports**

**Warrington Certification Limited**  
**Holmesfield Road**  
**Warrington**  
**Cheshire**  
**WA1 2DS**  
**UK**

8. European Technical Assessment:

**N/A**

9. Declared performance


<b>Essential characteristics</b>	<b>Performance</b>	<b>Harmonised technical specification</b>
<b>Self-closing ability</b> -5.4.2 Closing force -5.1.2 Return force of latch bolt	Grade 5= 200kg door mass with 25N maximum closing force >2.5N	<b>EN 12209:2003/AC 2005</b>
<b>Durability of self-closing action</b> -5.3.1 Durability of latch action	Grade H=200,000 cycles with 10N side load on latch bolt.	
<b>Ability to maintain door in closed position and not contribute to the spread of fire</b> -5.5 Suitability for use on fire/smoke doors	Grade 1: suitable for use on fire/smoke resisting doorset assemblies	
<b>Control of dangerous substances</b> -5.1.1 Dangerous substances	The materials in this lock do not contain or release any dangerous substances in excess of the maximum levels specified in existing European material standards or any national regulations.	

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

The declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Ben Penson: Technical Director

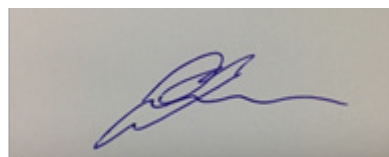

25/06/2013